




Turner Uni-Drive

20M — Manual Shift

Ratio range 1.00 - 2.62 : 1
 Torque Capacity - 4250 in-lbs (Manual)
 3000 in-lbs (Automatic)
 Approx. Weight 340 lbs

2, 3, 4, and 6 speeds with manual shift
 2 or 4 speeds with pneumatic shift
 Off-the-shelf components for all ratios
 Available with reversing ratios

DIMENSIONS

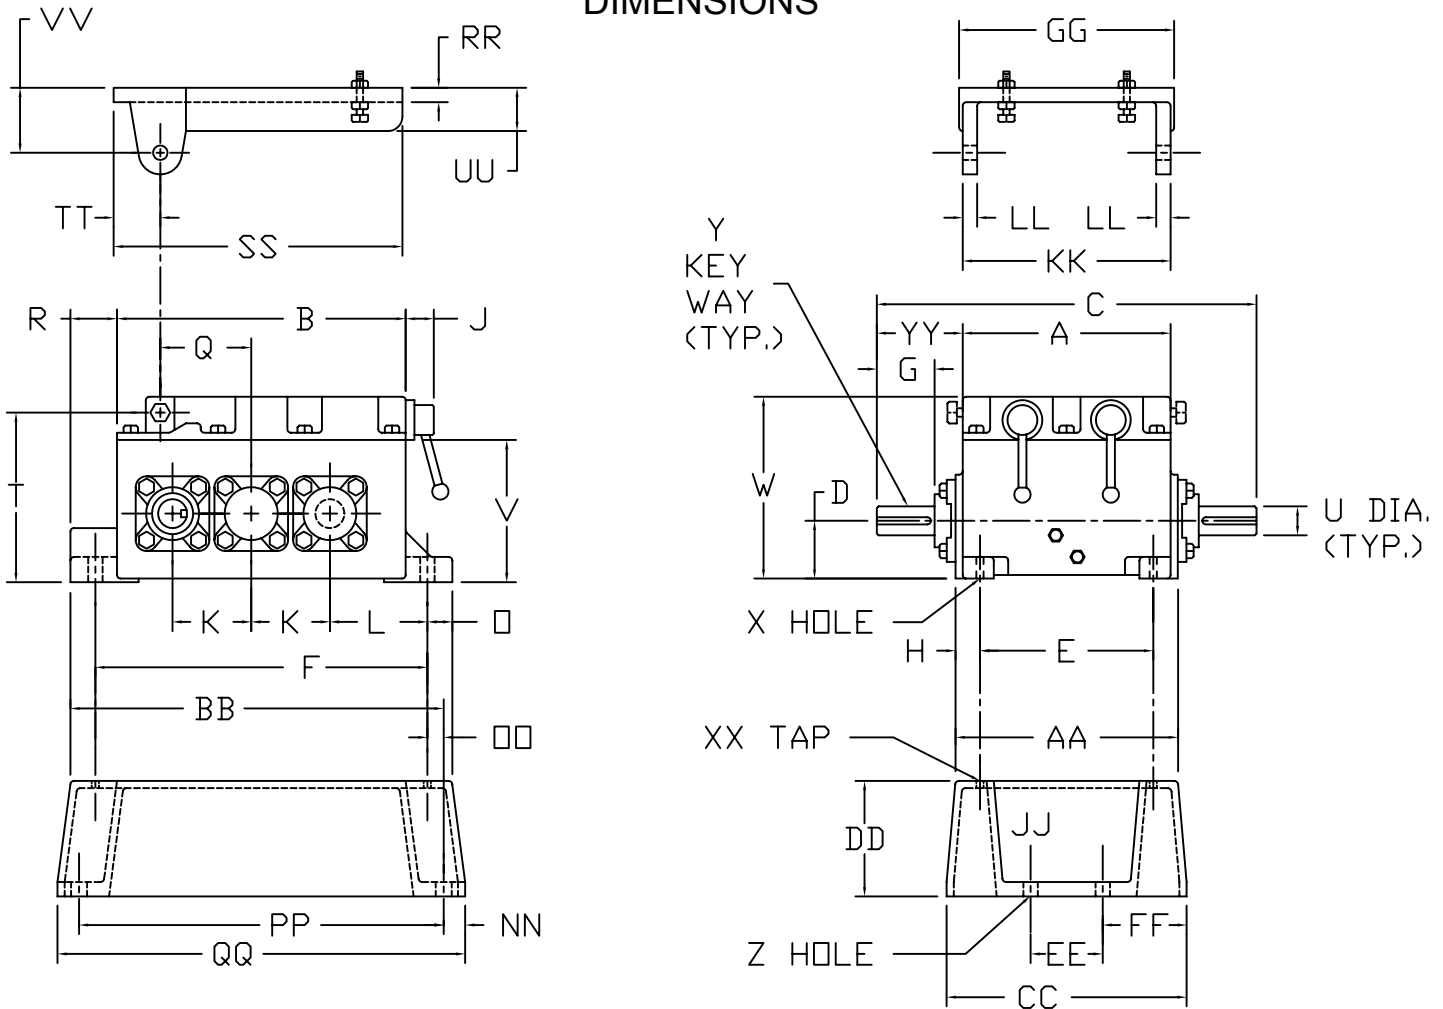

| | | | | | | | | | | | |
|----|--------|--------|-------|--------|--------|---|-------|-------|-------|--------|-------|
| A | B | C | D | E | F | G | H | J | K | L | □ |
| 15 | 17 1/4 | 27 1/4 | 4,250 | 10 3/4 | 20 1/8 | 5 | 2 1/8 | 1 5/8 | 5,000 | 5 1/16 | 15/16 |

| | | | | | | | | |
|-------|-------|----------|-------|---------|----------|---------|-------------------|---------|
| Q | R | T | U | V | W | X | Y | Z |
| 7 1/8 | 2 3/8 | 10 13/16 | 2,250 | 8 13/16 | 11 13/16 | 7/8 DIA | 1/2 X 1/4 X 4 1/2 | 7/8 DIA |

| | | | | | | | | | | | |
|----|--------|--------|-------|----|-------|--------|-------|--------|----|-------|-----|
| AA | BB | CC | DD | EE | FF | GG | JJ | KK | LL | NN | □□ |
| 15 | 22 1/8 | 15 1/2 | 6,000 | 5 | 5 1/4 | 15 3/8 | 2 7/8 | 14 5/8 | 1 | 1 1/4 | 1/8 |

| | | | | | | | | |
|--------|--------|-----|----|-------|-------|----|------------------|-------|
| PP | QQ | RR | SS | TT | UU | VV | XX | YY |
| 20 3/8 | 22 7/8 | 5/8 | 17 | 2 5/8 | 1 5/8 | 5 | 3/4-10 NC THREAD | 6 1/8 |

DIMENSIONS ARE IN INCHES AND ARE NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED