


## 20M — Manual Shift

Ratio range 1.00 - 2.62 : 1 Torque Capacity - 4250 in-lbs (Manual)

Approx. Weight 340 lbs

2, 3, 4, and 6 speeds with manual shift 2 or 4 speeds with pneumatic shift Off-the-shelf components for all ratios Available with reversing ratios

U DIA. (TYP.)

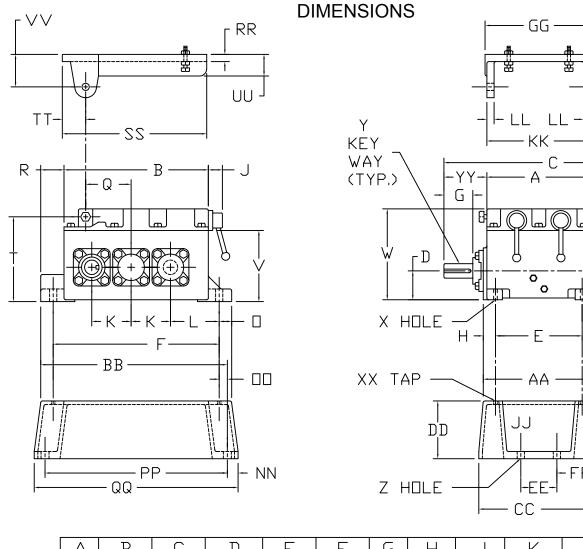

	Α	В	С	D		E	F		G	Н	JK			L	
	15	17 1/4 27 1/4		4.250	10 3/4		20 1/8		5	2 1/8	1 5/8	5,000	5	1/16	15/16
Q		R	Τ	U			W		X		Υ			Z	
7 1/8		2 3/8	10 13/16	2.250	8 13/16		11 13/16		7/8 DIA		1/2 X 1/4 X 4 1		1/2	2 7/8 DIA	
	A	A BB	CC	DI	) [	EE	FF		JG	JJ	KK	LL	N	1 [	
	15	i 22 1/	′8 15 1/	2 6.00	0	5	5 1/4	15	3/8	2 7/8	145/8	3 1	1 1.	/4	1/8
		PP	PP QQ		SS	T	T U	UU		/	XX		T \	YY	
		50 3/8	22 7/8	5/8	17	2 5,	/8 1 5	1 5/8		3/4	3/4-10 NC THREAD			1/8	]

DIMENSIONS ARE IN INCHES AND ARE NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED