



Ve 50M — Manual Shift

Ratio range 1.00 - 4.00 : 1 Torque Capacity - 7240 in-lbs (Standard Gears) 10860 in-lbs (Special Gears) 2, 3, 4, and 6 speeds with manual shift 2 or 4 speeds with pneumatic shift Off-the-shelf components for all ratios Available with reversing ratios

10860 in-lbs (Special Gears
Approx. Weight 515 lbs

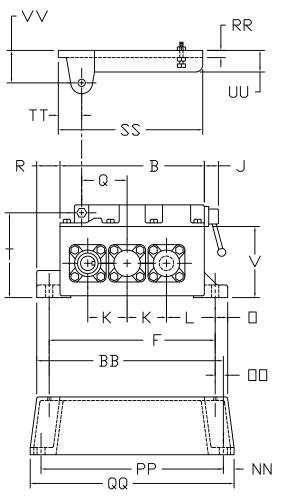

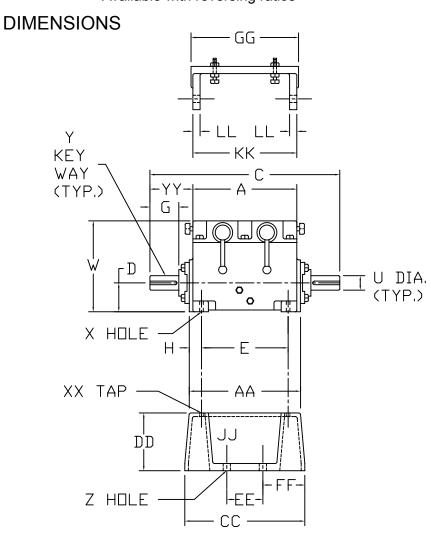

	T =											, 1					
	B		U	Ш		E	_	F	F		Н	J	K		L		
211/4	193	193/8		4.6	250	16 3/4 8		22 1/8		5 2	2 1/4	1 7/8	5.00	00	6 7/16	1 1/	8
Q	R	R			U	,	VW			X		Υ				Z	
7 1/16	2 1/2	1/2 10 29/32		2.2	250	8 2	29/32	11 31/32		7/8	DIA	1/2 X 1/4 X 4 1		1/2 7	'2 7/8 DIA		
AA	A BE		CC		DD	EE		FF		GG	JJ	Kk	KK LL		NN]
21 1/4 24 3/		3/8	213/	4 6	.000	11	1/2	5 1/8	2	17/8	2 5/	8 211,	/8 1	1/4	1 1/	3 7/16	5
	PP	P QQ I		RR	23	22		T UL		$\vee\vee$		XX		YY			
	23	24 7/8		3/4	21 :	1/4	3 7/	8 3 1/	3 1/4		3/4-10 NC THREAD			6 1/8			

DIMENSIONS ARE IN INCHES AND ARE NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED