



Ratio range 1.00 - 2.00 : 1 Torque Capacity - 7240 in-lbs (Standard Gears) 10860 in-lbs (Special Gears) Approx. Weight 365 lbs

FIVE 52M — Manual Shift

2 or 3 speeds with manual shift 2 speed with pneumatic shift Off-the-shelf components for all ratios Available with reversing ratios





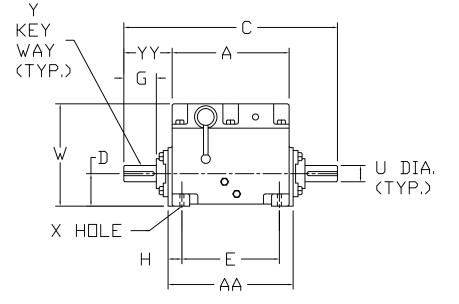

Hinged Motor Plate and Mounting Base available as $\Box ptional$ Accessories. Contact TURNER UNI-DRIVE for Dimensions.

| | А | В | С | | D | | E | F | | GH | | L H | | К | | |
|-------|---|-------------------|--------------------|------|-------|-----|---------|---------|---------|-------|-------|------------------|-------|-----|-----|--------|
| 211/4 | | 143/ | ⁷ 8 331 | /2 | 4.750 | 0 1 | l6 3/4 | 4 17 1/ | 8 | 5 | 2 1/4 | | 2 1/8 | 5.0 |)00 | 6 1/16 |
| | | | R | | U | ١ | \vee | W | | Х | | | Y | | | |
| | | 1 1/8 2 1/2 2,250 | | ,250 | 8 | 7/8 | 13 5/16 | > | 7/8 DIA | | 1/ | 1/2 X 1/4 X 4 1, | | 1/2 | | |
| | | | | | | Α | AA | BB | | ΥY |] | | | | | |
| | | | | | | 21 | 1/4 | 19 3/8 | 6 | 5 1/8 |] | | | | | |

DIMENSIONS ARE IN INCHES AND ARE NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED